




Double magnetic powder brake

Type	2 x FRAT 2002
Rated moment Md	2 x 200 Nm
Power loss Pv	2 x 750 watt *
Tension U	2 x 24VDC
Rated current I	2 x 1.55A

* without radial separate ventilation

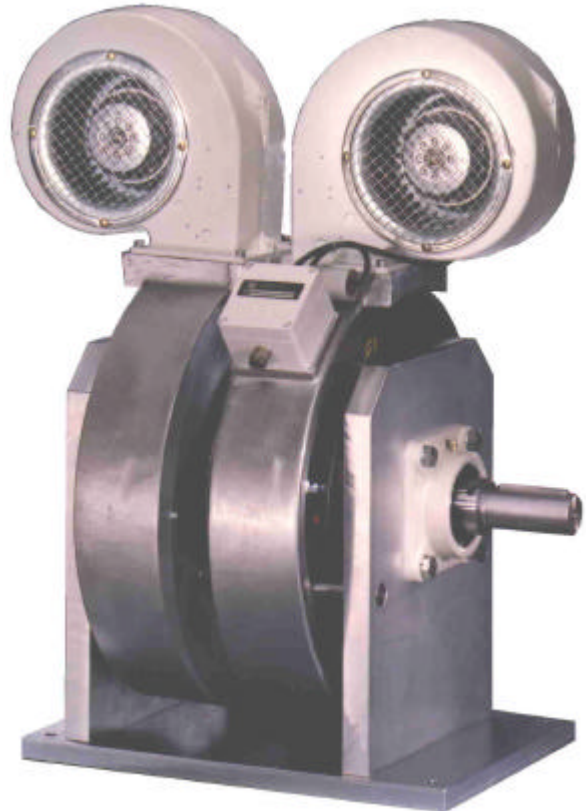

OPTION:

Radial separate ventilation

The air ring is ready mounted with a radial fan, motor with thermo-contact (self-switching), protective grid, operating condenser and terminal box.

Mains voltage: 230VAC / 50 Hz.

The dissipation of the power loss into heat at the magnetic powder brake is limited due to the size of the housing of the brake. By utilising the radial external fan the heat dissipation will be increased.